

LINEAR SERIES

LED Linear High Bay Light



Features


1. 5 years warranty
2. Original Lumileds 5050 which up to 180Lm/W
3. With the best quality UL driver
4. They are assembled by module light weight aluminum fin
5. IP65 waterproof ,dust-proof ,explosion-proof and anti-corrosion
6. Using aluminum fin heat sink which heat transfer faster than die cast
7. Tiny package and lighter,lower freight cost,more competitive in the market
8. Available for warehouse,tunnel lighting,advertisement ,gas station and factory lighting etc

5
Years
Warranty

50000
Hour
Long Service Life

Dimension

Unit:mm

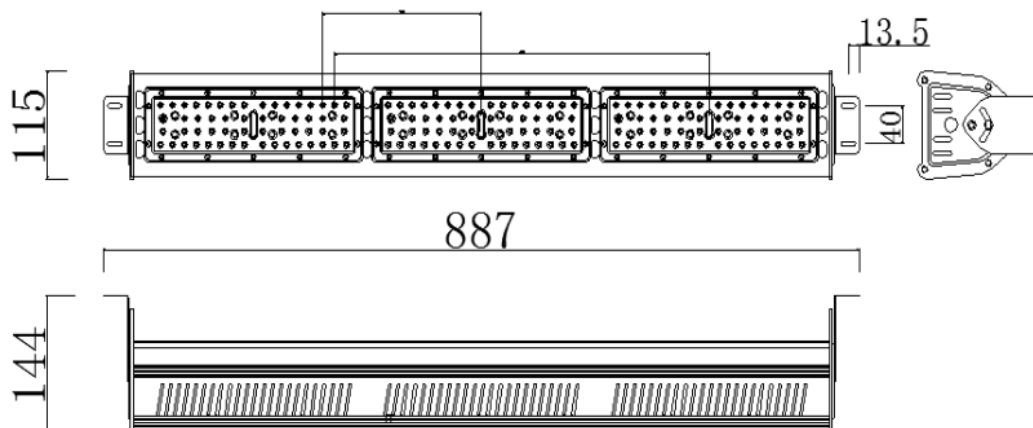

Linear

LED Linear High Bay Light

- Light Source: Lumileds 5050
- Input Volt: 100-277VAC / 347-480VAC
- IP Rating : IP65
- Beam Angle: 60° / 90° / 120° (Symmetrical Angle)
- Beam Angle: 80x155° (Polarization Angle)
- Color Temp: 4000K 5000K
- Size: 887x115x144mm (34.92 x 4.53 x 5.67inch)
- Certificates: TUV CE RoHS ETL DLC
- 5 years warranty



100-277V



347-480V



Dimmable



50,000H



IP65




-30~45°C

Specifications


Model NO.	LSLHBL-150W
Wattage	150W
Input Voltage	100-277VAC
Driver	Meanwell XLG-150-H-A / Sosen driver SS-150GA-56
LED Brand	Lumileds 5050
Efficiency	180lm/w
Lumen	27,000Lm

Beam Angle


Symmetrical Angle

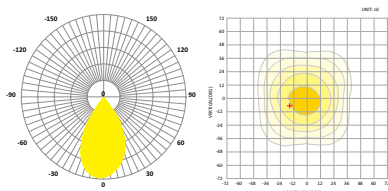

60°

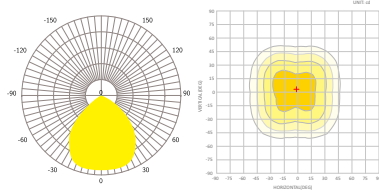


90°

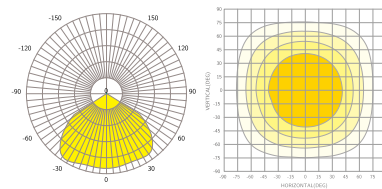


120°

Polarization Angle

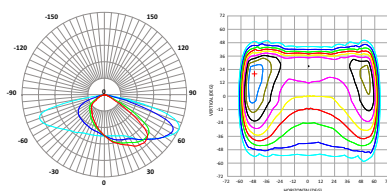


80 x 155°


Application

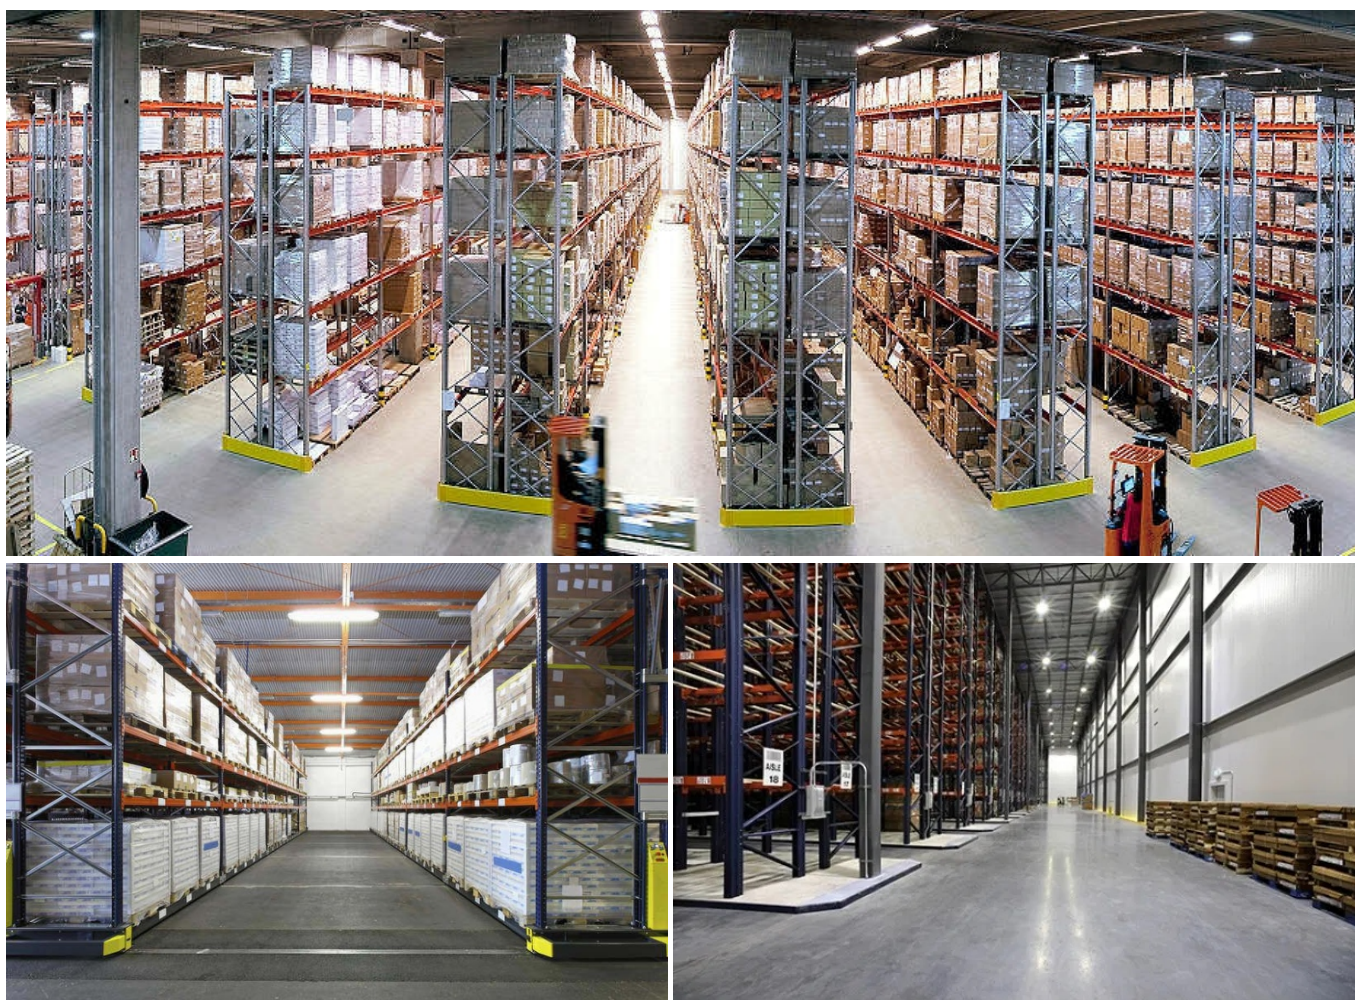

Installation

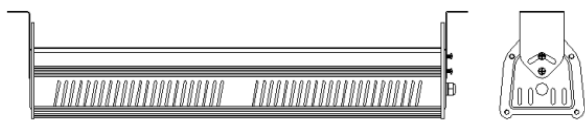

Ceiling/Wall Mount(rotatable)

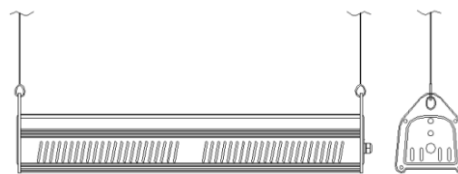

Chain hanging style

Package details

Wattage	Size of Box	Weight	Box Quantity
150W	95x19x22cm	6.0Kg	1PC