175_{LM/W}



SLIM PRO LED HIGH MAST LIGHT



SILM PRO SERIES

SILM PRO series LED HIGH MAST LIGHT is built with robust Folding aluminum fin module housing and heavy duty anticorrosive surface treatment for sparking the beauty and improving lighting conditions of applied area. Originated by the demand for large field lighting applications, SILM PRO series flood lights can be extended to 1440W and fixture efficacy reaches to 165LPW, better brilliance, less energy consumption.

















2 IP66 WATERPROOF & IK10

- 1. High luminaire efficiency up to 175lm/w
- 2. Marine grade aluminum housing
- 3. IP66 and IK10 protection rate
- 4. 5 years warranty
- 5. Folding aluminum fin design which are very light weight



Each module of slim pro high mast lights series comes with M20 Waterproof Breathable Pressure Relief Vent Plug



Folding aluminum fin design

Folding aluminum fin design which are very light weight. Increase the heat dissipation surface area by air cooling to dissipate heat and expand the contact area with air! It speeds up the spread of heat! Thermal effect is good! Compared with traditional die-cast aluminum and profile aluminum, which is heavier and there are certain safety risks. On the contrary, the aluminum fin heat sink are more secure.



The module heat sink adopts the hemming design to prevent the deformation of the heat sink due to crash during the shipment and enhance the flatness and strength of the contact surface of the module heat sink.




Folding Aluminum Fin


High pure thermal conductive module Folding aluminum fin heat sink is made with high pressure Folding technology



The module heat sink adopts the hemming design to prevent the deformation of the heat sink due to crash during the shipment and enhance the flatness and strength of the contact surface of the module heat sink.





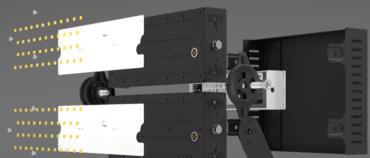

PC Lens

The optical lens is made of PC, and the transmittance reaches 92%, reducing light loss, maximize the lumens on where it should be lit up and evenness, minimize lighting pollution to nature and human life.

Swivel Bracket

The fixing bracket is made of high-strength material and is bent at an angle of 45° to make the lamp body better installed.




Features


- 1. High luminaire efficiency up to 175 Lm/w
- 2. Marine grade aluminum housing
- 3. IP66 and IK10 protection rate
- 4. 5 years warranty
- 5. Folding aluminum fin design which are very light weight
- 6.ETL DLC TUV CE CB SAA RoHS LM79 LM80 TM21 IK10 Salt Spray test approved





Dimension Unit:mm





SLIM PRO

LED HIGH MAST LIGHTS

· Light Source:Luminleds 5050

• Input Volt: 100-277VAC / 347-480VAC

• IP Rating IK Rating: IP66 & IK10

• Beam Angle:10° 20° 40° 60° 90° 140x100° 135x60° (P50)

Color Temp: 4000K 5000KEfficiency: 175Lm/w±3%

1-10V dimmableWeight: 5.5Kg5 years warranty



























100-277\

347-48UV

nmable

50,000H

Adjust

-40~45°C

IKTU


P50(135*60°)

P66 Folding Aluminum Fin

Specifications

Model	LSHM-200W-LV(XXK)	LSDHM-240W-LV(XXK)	
Watt	200W	240W	
Efficency	175LM/W±3%	175LM/W±3%	
Dimensions	342x362x132mm	342x362x132mm	
Lumen	35,000Lm	42,000Lm	
CCT	4000K 5000K	4000K 5000K	
Driver	Meanwell Driver XLG-240-H-A	Meanwell Driver XLG-240-H-A	

Beam Angle

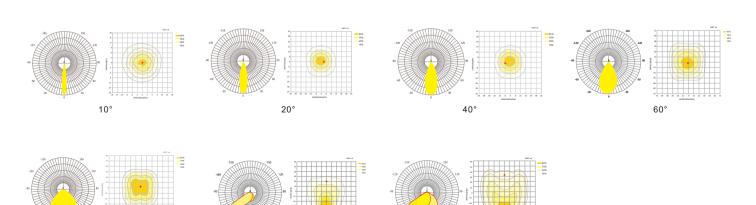

97*47°(TypeIV)









For area lighting for interior and exterior applications:

airport, golf course, factories, plants, warehouse, exhibition halls, gym, seaport, highway, high mast lighting and etc.

Installation







Ground Installation



Round Pole Installation



Pole Installation

Package details

Wattage	Size of Box	Weight	Box Quantity
200W	46x42x22cm	7.0Kg	1PC
240W	46x42x22cm	7.0Kg	1PC