

The photograph may not match the reference exactly. Please read the product description to identify the finish.

### TECHNICAL CHARACTERISTICS




Product Model:	D-170S1LED30-16	D-170S1LED40-24	D-170S1LED60-24
IP Protection degrees:	IP66		
IK Protection degrees:	IK08		
Light source:	16 x LED CREE / 16 x LUXEON 5050	24 x LED CREE / 24 x LUXEON 5050	
Total power consumption:	30W	40W	60W
Luminous Flux:	3500-3700Lm	4500-5000Lm	6000-7000Lm
Luminous efficiency:	100-125Lm/w		
Color temperature:	4000K as standard. Optinal 2700K,3000K & 5700K. Amber LED available		
Voltage/Frequency:	100-240V/50-60Hz		
Warranty(Years):	5		
Units per box:	1		
Net Weight(Kg)	5.2	5.3	5.3

### MATERIALS / FINISHES

<b>Structure material:</b> High purity aluminium	<b>aiffuser material:</b> Glass
<b>Structure finish:</b> Silver	<b>Diffuser finish:</b> Transparent


### GEAR

Multi-voltage electronic gear included (110-240 V / 50-60 Hz)

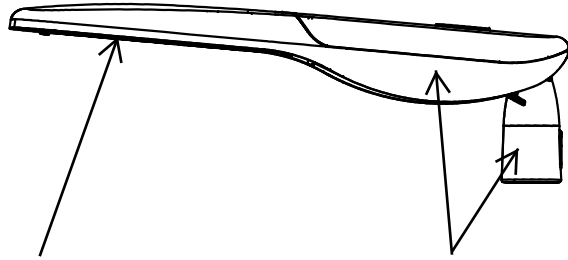

Ultra-white glass


High purity aluminum

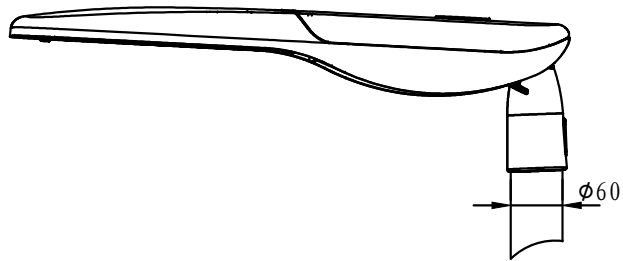


installation template

# OUTDOOR


①

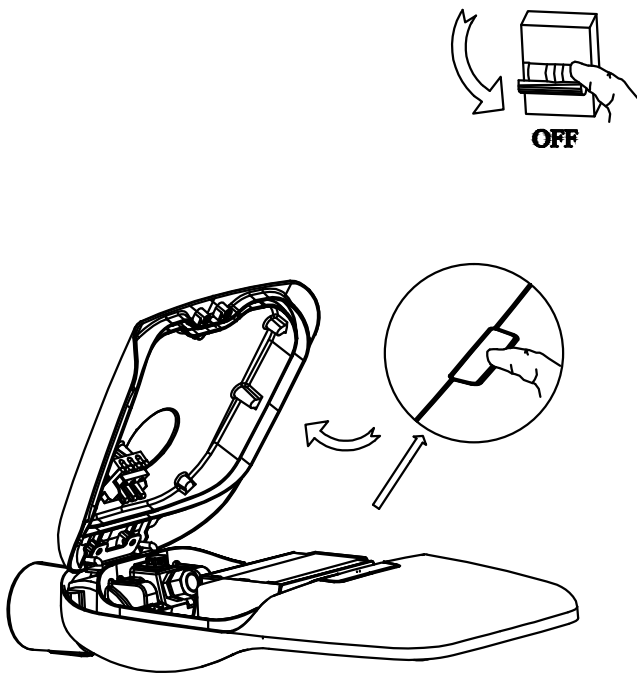

②

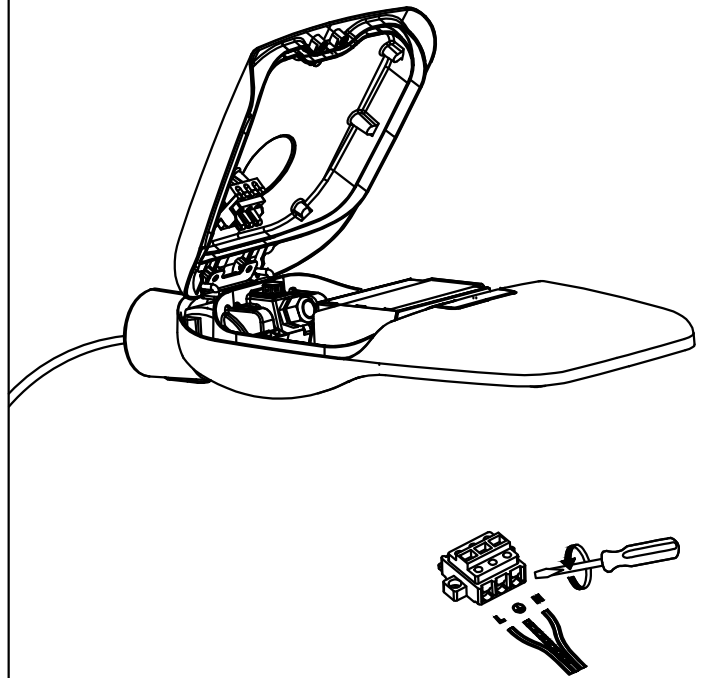

③

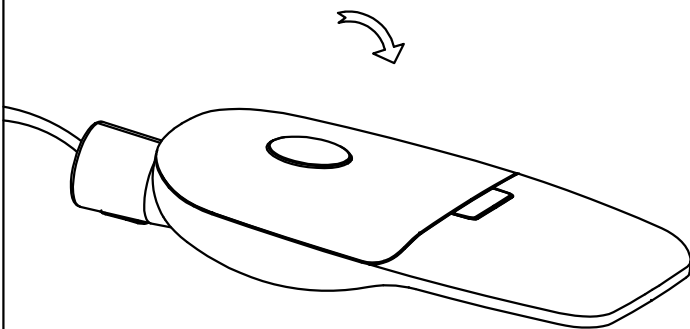

④

