



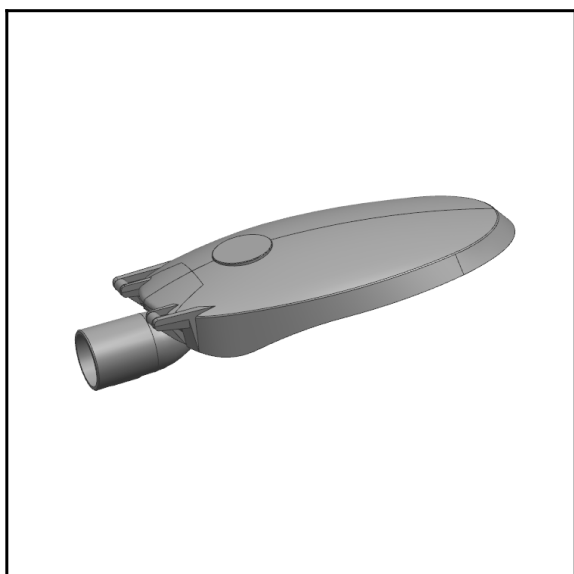

The photograph may not match the reference exactly.
Please read the product description to identify the finish.

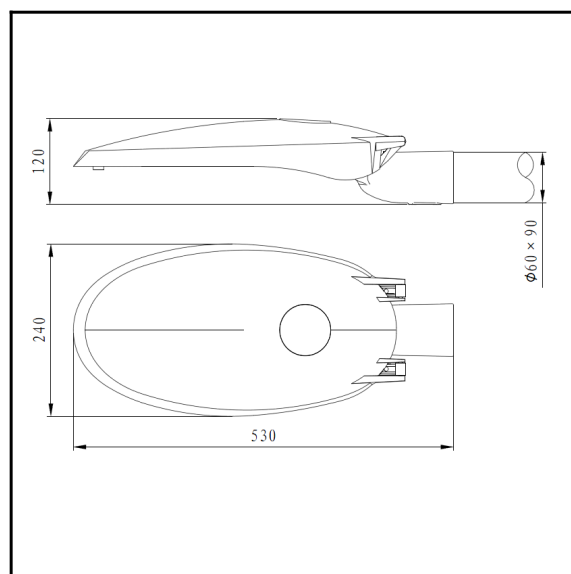

Product Model:	D-150S1LED15-8	D-150S1LED20-8	D-150S1LED30-16
IP Protection degrees:	IP66	IP66	IP66
IK Protection degrees:	IK09	IK09	IK09
Light source:	8 x LED CREE / 8 x LUXEON 5050		16 x LED CREE / 16 x LUXEON 5050
Total power consumption:	15W	20W	30W
Luminous Flux:	1425-1800Lm	1900-2400Lm	2850-3600Lm
Luminous efficiency:	95-120Lm/w		
Color temperature:	4000K as standard. Optinal 2700K, 3000K & 5700K. Amber LED available		
Voltage/Frequency:	100-240V/50-60Hz		
Warranty(Years):	5		
Units per box:	1		
Net Weight(Kg)	5.3	5.3	5.6


MATERIALS / FINISHES

Structure material: High purity aluminium	aiffuser material: Glass
Structure finish: Silver	Diffuser finish: Transparent

GEAR


Multi-voltage electronic gear included (110-240 V / 50-60 Hz)

Lm^(N): Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.

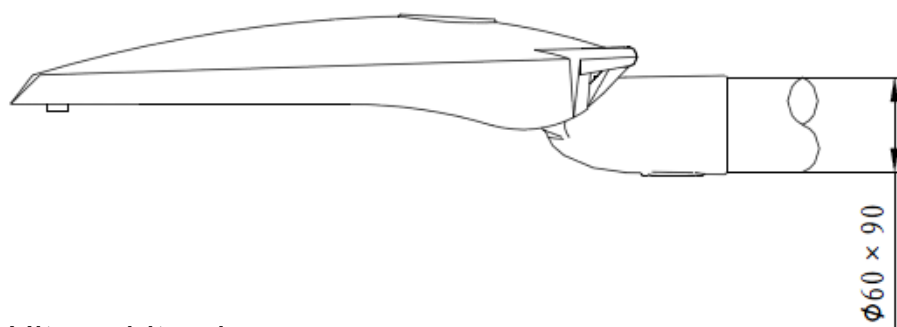

Ultra-white glass

High purity aluminum

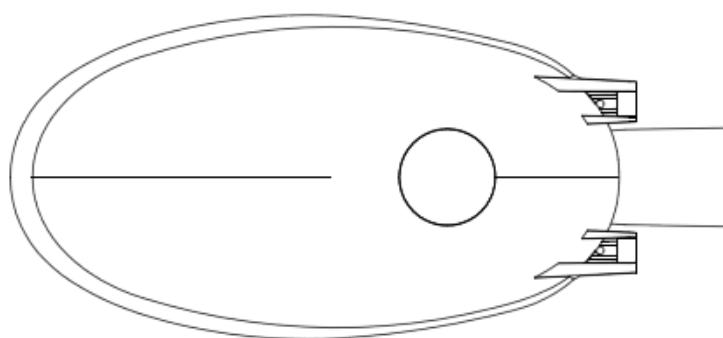

Installation template