




The photograph may not match the reference exactly.
Please read the product description to identify the finish.

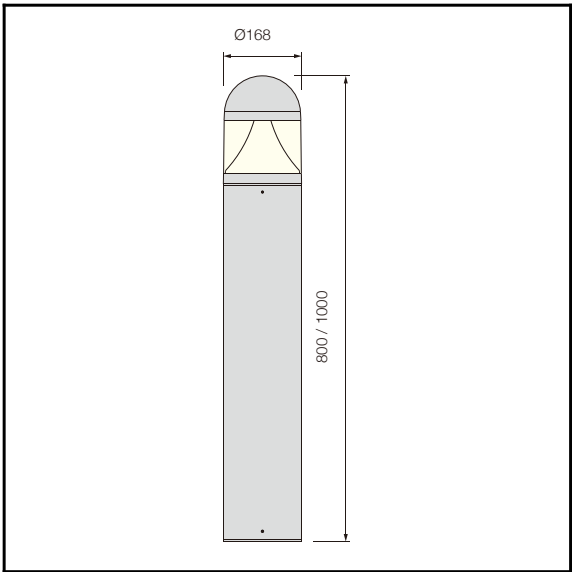

C-14

TECHNICAL CHARACTERISTICS



Product Model:	C-14H100
IP Protection degrees:	IP65
IK Protection degrees:	IK08
Light source:	132 x SMD 2835
Total power consumption:	25W
Luminous Flux:	1750-2000Lm
Luminous efficiency:	70-80Lm/w
Color temperature:	4000K as standard.Optinal 2700K,3000K & 5700K. Amber LED available
Voltage/Frequency:	100-240V/50-60Hz
Warranty(Years):	3
Units per box:	1
Net Weight(Kg)	5.3

MATERIALS / FINISHES


Structure material:	High purity aluminium	aiffuser material:	PC
Structure finish:	Black	Diffuser finish:	Transparent

GEAR

Multi-voltage electronic gear included (110-240 V / 50-60 Hz)


Lm^(N): Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.

Transparent PC

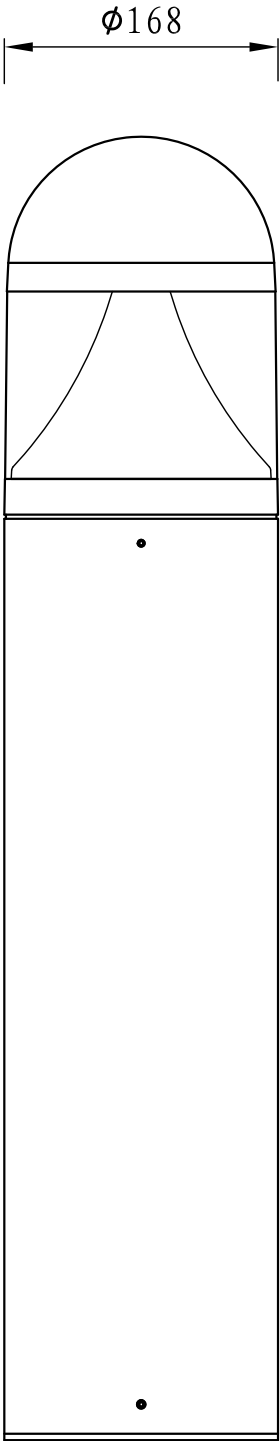

800/1000

High purity aluminum

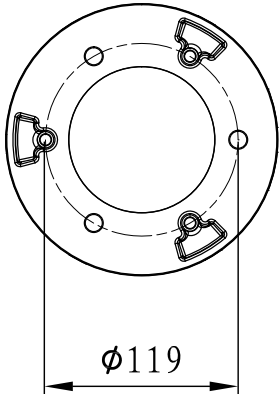

$\phi 119$

Installation template